



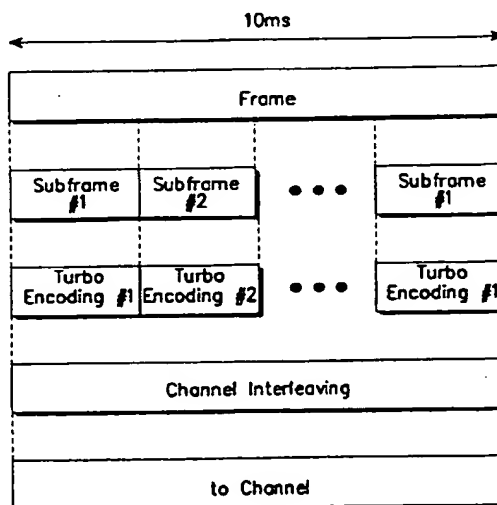

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04B</b>	<b>A2</b>	(11) International Publication Number: <b>WO 99/50963</b> (43) International Publication Date: <b>7 October 1999 (07.10.99)</b>
<p>(21) International Application Number: <b>PCT/KR99/00154</b></p> <p>(22) International Filing Date: <b>31 March 1999 (31.03.99)</b></p> <p>(30) Priority Data: <b>1998/11380</b>      <b>31 March 1998 (31.03.98)</b>      <b>KR</b></p> <p>(71) Applicant: <b>SAMSUNG ELECTRONICS CO., LTD. [KR/KR];</b> <b>416, Maetan-dong, Paldal-gu, Suwon-shi, Kyungki-do</b> <b>442-370 (KR).</b></p> <p>(72) Inventors: <b>PARK, Chang, Soo; 72-2, Munjong-dong,</b> <b>Songpa-gu, Seoul 138-200 (KR). JEONG, Joong, Ho;</b> <b>63-34, Chamwon-dong, Socho-gu, Seoul 137-030 (KR).</b> <b>LEE, Hyeon, Woo; Byeoksan Apt., #806-901, Kwon-</b> <b>son-dong, Kwonson-gu, Suwon-shi, Kyonggi-do 441-390</b> <b>(KR).</b></p> <p>(74) Agent: <b>LEE, Keon, Joo; Mihwa Building, 110-2, Myon-</b> <b>gryun-dong, 4-Ga, Chongro-gu, Seoul 110-524 (KR).</b></p>		<p>(81) Designated States: <b>AU, BR, CA, CN, JP, RU, European patent</b> <b>(AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT,</b> <b>LU, MC, NL, PT, SE).</b></p> <p><b>Published</b> <i>Without international search report and to be republished</i> <i>upon receipt of that report.</i></p>

(54) Title: TURBO ENCODING/DECODING DEVICE AND METHOD FOR PROCESSING FRAME DATA ACCORDING TO QoS

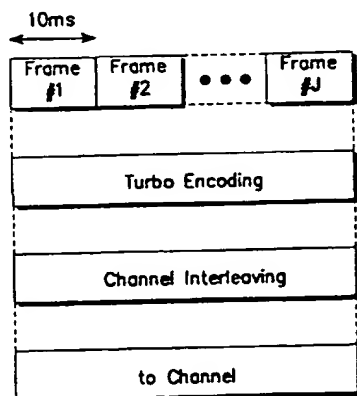

## (57) Abstract

A turbo channel encoding/decoding device for a CDMA communication system. The device segments an input frame into multiple sub frames of an appropriate length when the input data frame is very long, and then encodes and decodes the sub frames. Otherwise, when the input data frames are very short, the device combines input frames into one super frame of an appropriate length and then encodes and decodes the super frame. After frame encoding/decoding, the frames are recombined into the original input frames.

**FOR THE PURPOSES OF INFORMATION ONLY.**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

TURBO ENCODING/DECODING DEVICE AND METHOD FOR PROCESSING  
FRAME DATA ACCORDING TO QoS

BACKGROUND OF THE INVENTION

1. Field of the Invention

5       The present invention relates generally to a device and method for encoding/decoding a channel data in a mobile communication system, and in particular, to a device and method for encoding/decoding a channel data using a turbo code.

10       2. Description of the Related Art

      An encoder using a turbo code (hereinafter, referred to as a turbo encoder) encodes an N-bit input frame into parity symbols using two simple parallel concatenated codes, wherein an RSC (Recursive Systematic Convolutional)  
15   code is generally used as a component code.

      FIGs. 1 and 2 illustrate structures of a conventional parallel turbo encoder and decoder, which are disclosed in U.S. Patent No. 5,446,747 by Berrou incorporated herein by reference.

- 2 -

FIG. 1 is a block diagram showing a configuration of a conventional turbo encoder. The turbo encoder of FIG. 1 includes a first constituent encoder 12, a second constituent encoder 14 and an interleaver 16 interconnected therebetween. For the first and second constituent encoders 12 and 14, an RSC encoder can be used, which is well known in the art. The interleaver 16 has the same size as a frame length of the input data (i.e.,  $N$  bits), and decreases the correlation of the input data bitstream  $d_k$  provided to the second constituent encoder 14. Therefore, the parallel concatenated codes for the input data bitstream,  $d_k$ , become  $x_k$  (i.e.,  $d_k$  without modification), and  $y_{1k}$ , and  $y_{2k}$  the outputs of the first 12 and second 14 constituent encoders.

FIG. 2 is a block diagram showing a configuration of a conventional turbo decoder. The turbo decoder includes an adder 18, subtractors 20 and 22, a soft decision circuit 24, delays 26, 28 and 30, and MAP (Maximum A Posterior Probability) decoders 32 and 34. The turbo decoder further includes an interleaver 36 which is identical to the interleaver 16 of FIG. 1, and deinterleavers 38 and 40. The turbo decoder repeatedly decodes data received by the frame unit using a MAP decoding algorithm, thereby increasing a bit error rate (BER). For implementation of turbo decoder SOVA (Soft output viterbi algorithm) could be used instead of said

- 3 -

MAP decoding algorithm.

The utilization of interleaver 16 of the turbo encoder of FIG. 1 implies that encoding and decoding should be performed as a frame unit. Accordingly, it can be appreciated that the required memory and calculations required for the MAP decoders 32 and 34, shown in FIG. 2 are proportional to a value obtained by multiplying the frame size by a number of states of the first and second constituent encoders 12 and 14 of FIG. 1.

10 In a mobile communication system, voice and data are transmitted at a data rate of several Kbps to several Mbps, and a frame length of data input to a channel encoder may vary from several ms (milliseconds) to several hundred ms. For example, in the case where the data is  
15 transmitted at a data rate of over 32Kbps. The number of data input to the turbo encoder is larger due to high data rate, the turbo decoder requires more memory and calculations to decode the received data. The turbo encoder shows a property that an error correction  
20 performance is enhanced as the frame length of the input data becomes longer, however increasing the memory and calculations required in a decoder.

In addition, if the length of the input frame is too short e.g., less than 8kbps/10 ms, the interleaver 16 in

- 4 -

the turbo encoder cannot sufficiently increase the correlation among the input data, thereby deteriorating the error correction performance. That is, when the frame length of the input data is longer (or input data rate is high), the turbo encoder structured as shown in FIG. 1 and the turbo decoder structured as shown in FIG. 2 require a lot of calculations and memory to perform encoding and decoding. Otherwise, when the frame length of the input data is shorter or the data rate of input data is lower, the turbo encoder may exhibit lower performance results, as compared with a convolutional encoder or a concatenated encoder (convolutional encoder + RS encoder), thereby increasing the BER.

Accordingly, it is possible to decrease the required calculations and memory capacity required for decoding by appropriately varying the processing size of the data input to the turbo encoder, independent of the data rate for the corresponding service, while fully securing the low BER required in the communication system.

20

According to the present invention, as embodied and broadly described herein, a channel encoding/decoding apparatus is provided including a first constituent encoder for encoding data bits of a super frame or plurality of sub frames, an interleaver for interleaving the data bits of the super frame or sub frames, and a

- 5 -

second constituent encoder for encoding the interleaved data bits of the super frame or sub frames. The second constituent encoder is coupled to the output of the interleaver.

5       The channel encoding/decoding apparatus can be used as part of a base station or mobile station. The novel turbo encoder would be included as part of a channel transmitter in accordance with an exemplary embodiment. The turbo encoder makes a determination as to whether to  
10 segment one input frame into several sub frames or assemble several input frames into one super frame.

#### SUMMARY OF THE INVENTION

It is, therefore, an object of the present invention to provide a channel encoding device and method for  
15 variably encoding input data frames to sub or super frames of appropriate length according to QoS (quality of service) of data to transmit.

It is another object of the present invention to provide a channel decoding device and method for decoding  
20 encoded frame data whose frame length is appropriately varied according to the QoS (quality of service) of data to transmit.

- 6 -

It is still another object of the present invention to provide a turbo channel encoding/decoding device and method for segmenting a long input frame or high data rate into multiple sub frames to be encoded, and for  
5 separately decoding the divided encoded sub frames and then recombining the decoded sub frames into the original frame length.

It is further still another object of the present invention to provide a turbo channel encoding/decoding  
10 device and method for combining short input frames or low data rate into a super frame having an appropriate length to encode the assembled super frame, decoding the assembled encoded super frame and then recombining the decoded super frame into the original frames.

15 It is further still another object of the present invention to provide a turbo channel encoding/decoding device and method for determining an optimal length of the sub/super frames by analyzing a quality of service (QoS) such as frame length, time delay tolerance, error  
20 tolerance, receiver complexity (especially receiver memory), a data rate correspondence to a service type of input frame data to be transmitted, and segmenting or combining an input data frame into sub or super frames according to the determination.



### BRIEF DESCRIPTION OF THE DRAWINGS

The above and other objects, features and advantages of the present invention will become more apparent from the following detailed description when taken in  
5 conjunction with the accompanying drawings in which like reference numerals indicate like parts. In the drawings:

FIG. 1 is a diagram illustrating a block diagram of a conventional turbo encoder;

FIG. 2 is a diagram illustrating a block diagram of  
10 a conventional turbo decoder;

FIG. 3 is a diagram illustrating a block diagram of a channel transmitter including a turbo encoder according to an embodiment of the present invention;

FIG. 4 is a diagram illustrating a method for  
15 combining turbo and encoding input frames according to an embodiment of the present invention;

FIG. 5 is a diagram illustrating a method for segmenting an input frame and turbo encoding the segmented frames according to an embodiment of the present  
20 invention; and

FIG. 6 is a diagram illustrating a block diagram of a channel receiver including a turbo decoder according to an embodiment of the present invention.

### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

- 8 -

A preferred embodiment of the present invention will be described hereinbelow with reference to the accompanying drawings. In the following description, well known functions or constructions are not described in detail since they would obscure the invention in unnecessary detail.

Communication systems of the future will have capabilities for providing a plurality of services with varying QoS (Quality of Service) characteristics, and QoS parameters including a time delay, BER, and frame error rate (FER)—Services may be generally divided into high error rate services and low error rate services. Those services which can be provided with a high error rate include: voice service which requires a relatively short time delay, and a short message service (SMS) which permits a long time delay. On the other hand, services requiring a low error rate include: a video conference service requiring a short time delay, and a still image or Internet file transfer service allowing a relatively longer time delay. Further, the same service may have different time delays and data rates.

For example, in the image service for transmitting and receiving moving picture information, a data rate is 32-2048Kbps and a permissible time delay is in the range of 10-400ms: the data rate and the permissible time delay

- 9 -

can be, however, varied according to a number of criteria including: a class of the user or terminal using the service, a class of the base station providing the service or a channel condition during the corresponding service. -

5 In a CDMA mobile communication system in particular, since the output power of a base station or a mobile station is limited, it is inadequate to increase a transmission power of only a certain user for a high quality service. This is because when the transmission power of the specific user

10 is increased, interference to other users will increase in proportion to the increased transmission power. Therefore, there is a demand for a method capable of providing various multimedia services with ~~reduced~~ interference to the other users~~;~~ by minimizing an increase in the

15 transmission power.

In another example, a short frame packet data transmission service requires a low data rate and a very low error rate. However, if the time delay is out of the question, it is reasonable to decrease the error rate even

20 though the time delay is somewhat increased. Therefore in this invention provide super frame concept.

In the meantime, the turbo encoder, for forward error correction, shows a property that the bit error rate (BER) or the frame error rate (FER) are varied according

25 to the data size of frame (the number of data bits to be

- 10 -

processed in a time) determined by length of the input data frame and data rate. The turbo encoder consists of constituent encoders having a short constraint length, however, the error correction capability is improved as  
5 the correlation between the data input to the respective constituent encoders is decreased, due to the existence of the interleaver in the turbo encoder. The correlation between the data input to the respective constituent encoders becomes lower, as the data size of frame input to  
10 the turbo encoder becomes much more. Therefore, an increase in the frame length of the input data improves the error correction capability. However, an increase in length of the input frame causes an increase in the time delay at the encoder and the decoder.

15 FIG. 3 illustrates a configuration of a channel transmitter including a turbo encoder according to an embodiment of the present invention. The turbo encoder shown in FIG. 3 segments one input frame into several sub frames or assembles several input frames into one super  
20 frame by counting bits of the input user data in accordance with provided message information, and thereafter encodes the segmented or assembled frames with a turbo code to transmit the encoded frames via a transmission channel. The term "message information" as  
25 used herein refers to information about the QoS, i.e., service type, rate of data such as voice, character, image

- 11 -

and moving picture data, size of the input data frame, permissible delay, and permissible error. The message information is exchanged between a base station and a mobile station during a call setup and the exchange of the message information is continued till termination of the corresponding service. Further, predetermined information between the base station and the mobile station predetermined during the call setup can also be varied during the corresponding service by data exchanging. That is, the message information including information representing the size of the frame to be processed in the turbo encoder can be reset according to a rate of the data to be serviced. For example, when 10ms frame data is serviced at a data rate of 2048Kbps, one data frame consists of 20480 bits. In this case, the turbo encoder according to the present invention segments (or divides) the 10ms frame into 10/4ms subframes and then, turbo encodes four 5120-bit subframe and then recombining four encoded sub frame into 10 ms frame for channel interleaving.. The turbo decoder then decodes the four encoded subframes and recombines them into one 20480-bit 10 ms frame.

FIG. 3 is a block diagram of a channel transmitter including a turbo encoder according to an exemplary embodiment of the present invention.

- 12 -

As shown in FIG. 3, user data (UD) is received by a source data encoder 42. The user data UD has a data rate of over several tens of Kbps, such as character, image and moving picture data, as distinguished from voice data having a much lower data rate on the order of several Kbps. The source data encoder 42 encodes the received user data UD by the fixed length frame whose length is determined in accordance with the service type and then provides the encoded fixed length frame data to an input of a bit counter 50. For example, the source data encoder 42 typically encodes voice data with a 10ms frame format, character data with a 20ms frame format, image data with an 80ms frame format, and moving picture data with a 40ms frame format, and provides the respective encoded data into the bit counter 50. The processing size can be different with respect to data rate or frame length. The frame length unit can be fixed 10 ms or fixed 20 ms. A central processing unit (CPU) 46 transfers information about the QoS, i.e., service type of the user data to be transmitted (e.g., voice, character, image or moving picture) and the data rate to a message information receiver 108 of FIG. 6 via a message information transmitter 44. The channel transmission device of FIG. 3 can be equally applied to both the base station and the mobile station.

Although the present invention is described with

- 13 -

reference to an embodiment which transmits the message information to the decoder using a separate transmitter, it is also possible to transmit the data size information by loading it in a head area of a transmission frame  
5 during data.

Referring to FIG. 3, the CPU 46 reads, from a frame segment/assemble information storage unit 48, QoS information including information about service type of data to be transmitted, corresponding data rate,  
10 permissible delay, permissible error rate (BER or FER) and frame length, and information about service class of the base station or the mobile station. Next, the CPU 46 makes a determination to segment the received frame and therefore must also determine the size and number of the  
15 segmented frames, using the read information. Alternatively, when constructing a super frame, the CPU 46 may determine to assemble the required frames and therefore must also determine the number of frames to be assembled, using the read information. Based on the  
20 determination, the CPU 46 provides a frame segment/assemble control signal and an interleaving mode signal to the bit counter 50 and a programmable interleaver 52, respectively, to perform turbo encoding. That is, according to the QoS of the data to transmit, the  
25 CPU 46 determines how many consecutive input frames should be assembled to generate a super frame, or alternatively

- 14 -

determines the number of sub frames which will be generated by segmenting one input frame. The turbo encoder then turbo encodes data bits of the super frame or data bits of the respective sub frames. As previously stated, 5 the QoS may include input frame length, user data rate, permissible delay, permissible error rate, etc. The size of the input frame can be determined based on input frame length and user data rate.

In determining whether to segment or assemble the 10 frames by the CPU 46, the following criteria are considered.

In general, for transmitting packet data, the mobile communication system uses a low data rate of below several tens of Kbps, with a transmission delay from several tens 15 to several hundreds ms (milliseconds) and requires a BER on the order of  $10^{-2}$ - $10^{-4}$ . For example, if the output frame of the source data encoder 42 is 10ms long and a permissible delay time permitted in the turbo encoder is 40ms, it is possible to assemble four 10ms frames output 20 from the source data encoder 42 into one super frame, which will be input to the turbo encoder. Therefore, the error rate of assembled packet data can be decreased.

For transmitting character, image and moving picture data, the mobile communication system has a permissible



- 15 -

transmission delay from several tens ms to several hundreds ms and requires a BER of  $10^{-5}$ - $10^{-7}$ . The performance of the turbo encoder is increased as the frame length of the input data is enhanced. However, additional  
5 calculations and memory is required in the turbo decoder. There is a trade off between performance and decoder complexity. In case of the packet data service, for example, it is possible to satisfy both the required BER and moderate decoder complexity by enabling the CPU 46 to  
10 generate a sub/super frame control signal for segmenting/combining the output data from the source data encoder 42, of M-bit length, into sub/super frames of N-bit length.

That is, the frame segment/assemble information  
15 storage unit 48 stores frame segment/assemble information for increasing the length N of the sub/super frame for a service requiring the low BER and for decreasing the length N of the sub/super frame for a service requiring a short time delay and a high BER. The CPU 46 reads the  
20 frame segment/assemble information from the frame segment/assemble information storage 48 according to the service type and the frame length of the input data.

Segmenting/combining the frames input to the turbo encoder can be more readily appreciated from the following  
25 example. Assume a frame size of the data input to the

- 16 -

turbo encoder is 20480 bits/10ms, for a low BER service having a data rate 2048 Kbps. In the mobile station- providing the above service, the turbo decoder requires a memory capacity which is proportional to 20480 bits  
5 multiplied by number of soft decision bits. An increase in the memory capacity of the mobile station causes an increase in complexity and cost of the mobile station.

However, in the service having a data rate of 2048Kbps/10ms, if the channel encoder divides (i.e.,  
10 segments) a frame input to the turbo encoder into four sub frames (i.e., 10ms/4) and encodes the sub frames, and a turbo decoder in the channel decoder then decodes the sub frames and recombines the decoded sub frames into the original frame, the turbo decoder requires a memory  
15 capacity which is proportional to 5120 bits by the number of soft decision bits, thereby causing a reduction in the required memory capacity.

Furthermore, for a low BER (e.g.  $10^{-6}$  -  $10^{-7}$ ) service having a low data rate of 32Kbps/10ms, each data frame  
20 input to the turbo encoder will consist of 320 bits. If encoding is performed at a data rate of 32Kbps/80ms (i.e., each frame consists of 2560 bits), the time delay is somewhat increased, as compared with the case where turbo encoding is performed at the data rate of 32Kbps/10ms  
25 (i.e., each frame consists of 320 bits). However, it is

- 17 -

possible to decrease the BER for the same signal-to-noise ratio ( $E_b/N_o$ ) or decrease the  $E_b/N_o$  value for the same BER, thereby increasing the overall system capacity.

In the mobile communication system, not all the users or mobile stations are provided with the same degree of services. Instead, the available data rate is limited according to the user class, the mobile station or the base station. In addition, the available data rate may be limited due to the memory capacity determined according to the class of the respective mobile stations. Accordingly, when the data rate is variable from 32Kbps to 2048Kbps according to the service type (or service option) and the permissible time delay also varies from 10ms to 400ms, the device according to the present invention can vary the length of the frames input to the turbo encoder according to the class of the user or mobile station, the class of the base station, service type or the channel condition while satisfying the required error rate of the corresponding service. For example, when the channel conditions is bad, the device according to the present invention can satisfy the error rate required by a corresponding service by increasing the length of the frames input to the turbo encoder and thereby permitting an increase in the time delay rather than increasing the transmission power.

- 18 -

The frame segment/assemble information which is the message information being exchanged between the base station and the mobile station, has information about the size of the frames to be encoded/decoded, wherein the  
5 frame size may be determined according to the user data rate, input frame length, permissible delay permissible error rate and the channel condition, etc.

The bit counter 50 counts N bits of the input data according to an N-bit frame segment/assemble control  
10 signal output from the CPU 46, and provides the counted N bits to the programmable interleaver 52 and first and second input buffers 54 and 56. The bit counter 50 also generates a bit count termination signal to the CPU 46 whenever it counts N bits of the input data. Therefore, it  
15 can be appreciated that the bit counter 50 segments or assembles the input frames into sub or super frames having a specific length, under the control of the CPU 46 which uses the QoS information, such as the service type and the data rate of the input data, stored in the frame  
20 segment/assemble information storage 48, and provides the sub or super frames to the programmable interleaver 52 and the first and second input buffers 54 and 56.

An interleaving processor 72, a component of the programmable interleaver 52, reads interleaving parameters  
25 from an interleaving parameter storage 70 according to an

- 19 -

interleaving mode control signal output from the CPU 46 to process the read interleaving parameters, and provides the processing result to an interleaving address mapper 74. Here, the CPU 46 provides the interleaving processor 72  
5 with the following interleaving information.

First, in the case where a turbo interleaver having a single interleaving method is used as the interleaver 52, optimal parameter values are provided as the interleaving information. The optimal parameter values are determined  
10 to have the highest performance according to the length of the data information bits sequence to be interleaved. The parameter values can be determined by experimentally obtained value.

Second, in the case where a turbo interleaver having  
15 one or more interleaving methods is used as the interleaver 52, optimal parameter values are provided as the interleaving information and are determined to have the highest performance through experiments according to the length of the information bits for interleaving and  
20 the variable length of the interleaver in the corresponding interleaving mode. For example, in the case where the required transmission delay time is short and the input data frame of the turbo encoder (i.e., the output data frame of the source data encoder 42) is small  
25 in size (or length), a uniform interleaver such as a block

- 20 -

interleaver or a cyclic shift interleaver is used for the interleaver 52. Otherwise, in the case where the required transmission delay time is relatively long and the input data frame is large in size, a non-uniform interleaver  
5 such as a random interleaver is used for the interleaver 52. From the foregoing description, it could be appreciated that various interleavers can be used according to the size of the data to be interleaved.

The interleaving address mapper 74 receives either  
10 sub or super frames of N-bit length segmented or assembled by the bit counter 50 the interleaving address mapper 74 maps the input bits to the interleaved input data buffer address corresponding to the interleaving processing result so as to perform interleaving, and  
15 provides the first interleaved sub or super frame data to an interleaved input data buffer (ILIB) 78 in the first buffer 54 alternately provide the second interleaved sub or super frame data to an ILIB 90 in the second buffer 56.

The first and second input buffers 54 and 56 each  
20 include two input switches, two output switches, an input data save buffer (IDSB) with input and output ports connected to ones of the input and output switches, and the ILIB with input and output ports connected to the other ones of the input and output switches. In the  
25 drawing, reference numerals 76 and 88 denote IDSBs,

- 21 -

reference numerals 78 and 90 denote ILIBs, reference numerals 80, 84, 92 and 96 denote input switches, and reference numerals 82, 86, 94 and 98 denote output switches. All the switches are controlled by the CPU 46.

5 The switches 80, 82, 84 and 86 in the first input buffer 54 operate as a mirror image in alternation with the switches 92, 94, 96 and 98 in the second input buffer 56. That is, input switches 80 and 84 in the first input buffer 54 are in the ON state and the output switches 82

10 and 86 are in the OFF state, while the input switches 92 and 96 in the second input buffer 56 are in the OFF state and the output switches 94 and 98 are in the ON state.

Accordingly, when the bit counter 50 counts N bits of the input data under the control of the CPU 46, the data

15 output from the bit counter is first stored in the IDSB 76 in the first buffer 54 through the input switch 80 which is initially in the ON state. At this moment, the counted data bits output from the bit counter 50 are interleaved by the programmable interleaver 52 and then stored in the

20 ILIB 78 in the first input buffer 54 through the switch 84. If the bit counter 50 generates a bit count termination signal for the sub/super frame of N-bit length, the CPU 46 then repeats the above procedure after switching the first input buffer 54 to an output state and

25 the second input buffer 56 to an input state. As a result, the next N bits counted from the bit counter 50 and the

- 22 -

interleaved data from the programmable interleaver 52 are stored in the IDSB 88 and the ILIB 90 in the second input buffer 56, respectively.

During this operation, a first RSC (RSC1) 58 and a  
5 second RSC (RSC2) 60 receive the N-bit sub/super frame data and the corresponding interleaved data output from the IDSB 76 and ILIB 78 in the first input buffer through the output switches 82 and 86, respectively, and then performs turbo encoding by the N-bit frame unit in the  
10 same manner as the turbo encoder of FIG. 1.

Next, when the N-bit frame data is completely stored in the second input buffer 56, the first input buffer 54 is again switched to the input state and the second input buffer 56 to the output state. Therefore, the RSC1 58 and  
15 the RSC2 60 turbo encode the data which are alternately output by the N-bit frame unit from the first and second input buffers 54 and 56.

The turbo encoded bits from the RSC1 58 and the RSC2 60 are multiplexed by a multiplexer 62 and then  
20 interleaved by a channel interleaver 64. In the case where the several input frames are assembled into one super frame and the data is turbo encoded by the super frame unit, the channel interleaver 64 performs channel interleaving by the super frame unit as shown in FIG. 4.



- 23 -

On the other hand, when one input frame is segmented into several sub frames and the data is turbo encoded by the sub frame unit, the channel interleaving is performed by the input frame unit as shown in FIG. 5. That is, the  
5 channel interleaver 64 performs channel interleaving by combining the output symbols of the turbo encoder, encoded by the super frame or sub frame unit, as large in size as the input frame. The interleaved data is modulated by a modulator 66 and then transmitted through a transmission  
10 channel 68.

Thus, the novel channel transmission device shown in FIG. 3 assembles the input data frames into super frames to increase the bit number  $N$  when a low BER is required from an analysis of the QoS information such as the user's  
15 service type (e.g., voice, character, image and moving picture). Otherwise, when a low decoder complexity is required, the novel channel transmission device segments the input data frame into subframes to decrease the bit number  $N$  per frame. In this manner, the channel  
20 transmission device can maximize the efficiency of the turbo encoder/decoder.

FIG. 4 is a diagram for explaining the operation of the invention, wherein the frames are assembled at a low or medium data rate and then turbo encoded. For example, a  
25 parameter  $J$  can be varied from 1 to 8 according to the

- 24 -

number of the frames to be assembled. In the turbo encoder, the bit number of an input data frame, which is determined by- multiplying the bit number of original frame by the frame number,  $J$ , may be limited depend on  
5 user data rate and decoder complexity.

FIG. 5 is a diagram for explaining operation of the invention, wherein a frame data- provided at a high data rate is segmented and then turbo encoded. A parameter  $I$  can be varied from 1 to 4 according to the number of the  
10 segmented sub frames. Likewise, in the turbo encoder, the bit number of an input data frame, which is determined by a value obtained by dividing the bit number of original frame by the number,  $I$ , of the segmented sub frames, may be limited depend on user data rate and permissible error  
15 rate.

The data on the transmission channel transmitted by the turbo channel encoder of FIG. 3 is decoded into the original data by the turbo channel decoder of FIG. 6, which is more fully described from the following  
20 description.

FIG. 6 illustrates the turbo channel decoder configuration according to an embodiment of the present invention. The turbo channel decoder of FIG. 6 counts bits of the user data input by the  $N$ -bit sub frame unit

- 25 -

according to message information to decode the input user data and thereafter, assembles the decoded data into frames having the original length, thereby recombining the user data.

- 5        When the user data consists of  $b$  N-bit super frame, the turbo decoder decodes the input user data and thereafter segments the decoded data into frames having the original length, thereby segmenting the user data.

Referring to FIG. 6, upon receiving a frame of N-bit  
10 length through the transmission channel 68, a demodulator 100 demodulates the received frame data and provides the demodulated data to a channel deinterleaver 102. The channel deinterleaver 102 descrambles the demodulated data frame and applies it to a demultiplexer 104, which  
15 demultiplexes the multiplexed data symbols and parity symbols and provides the demultiplexed symbols to a bit counter 106. Here, a message information receiver 108 receives message information regarding the service type of the user and the data rate that the message information  
20 transmitter 44 of FIG. 3 has transmitted, and provides the received message information to a CPU 112.

The CPU 112 analyzes the message information provided from the message information receiver 108 and reads frame segment/assemble information from a frame segment/assemble  
25 information storage 110 according to the analysis. Also,

- 26 -

the CPU 112 analyzes the interleaving information included in the message information and provides an interleaving mode signal and a parameter value to an interleaver and a deinterleaver in a turbo decoder 116 according to the  
5 analysis, thereby performing turbo interleaving. In addition, when the receiving data is sub frame (actually the received data is a original frame size but the frame is encoded by sub frame unit), the CPU 112 outputs an N-bit frame segment control signal before turbo decoding and  
10 a frame recombine control signal after turbo decoding according to the read message information. Here, the information stored in the frame segment/assemble information storage 110 is similar to that stored in the frame segment/assemble information storage 48 of FIG. 3.

15       When the receiving data is super frame, the CPU 112 controls turbo decoder to decode the received frame as it is and then a frame segmenting control signal after turbo decoding according to the read message information.

      The bit counter 106 consecutively provides the data  
20 output from the demultiplexer 104 to a frame buffer 114 by the N-bit sub frame unit according to the N-bit frame segment control signal. Switches 126 and 132 in the frame buffer 114 are initially in the ON state and the other switches 128 and 130 are initially in the OFF state.

- 27 -

Therefore, the counted data bits output from the bit counter 106 are initially stored in a first N-frame buffer (N-FB1) 122. Upon completion of storing the N-bit data output from the bit counter 106 in the N-FB1 122, the bit counter 106 generates an N-bit count termination signal. Upon detecting the N-bit count termination signal, the CPU 112 turns off switches 126 and 132 in the frame buffer 114 and turns on the other switches 130 and 128. Then, the N-bit data output from the bit counter 106 is stored in a second N-frame buffer (N-FB2) 124. At this moment, the received data stored in the N-FB1 122 is decoded by a turbo decoder 116 having the same structure as that of FIG. 2.

Accordingly, under the control of the CPU 112, the N-FB1 122 and the N-FB2 124 in the frame buffer 114 alternately receive and store the data output by the N-bit unit from the bit counter 106, and the stored data is decoded by the turbo decoder 116. When user data decoded by sub frame unit, the decoded data output from the turbo decoder 116 is recombined into the frames of the original length by a frame recombiner 118 which is controlled by the CPU 112, and then output as the user data through a source data decoder 120.

In summary, the turbo decoder 116, broadly described, receives a super frame consisting of multiple frames or

- 28 -

multiple sub frames segmented from a frame, and turbo decodes the received frames. The frame recombiner 118, under the control of the CPU 112, recombines, when user data decoded by sub frame unit the output of the turbo  
5 decoder 116 into the original frames in response to information about the frame size and number of the frames constituting the sub frames or information about the number of the sub frames segmented from the input frame and the size of the sub frames.

10       The frame recombiner 118, under control of the CPU 112 segments when user data decoded by super frame unit, the output of the turbo decoder 116 into the original frames in response to information about the frame size and number of the frames constituting super frame.

15       Another aspect of this invention, the turbo encoder of the present invention also includes a method in which any one of the bit counter 50 and the buffers 54 and 56 for interleaving, shown in FIG. 3, is not required. In the frame combining operation, the data bits are  
20 sequentially stored in the memory (i.e, buffer 54 or 56) for interleaving the number of the frames to be assembled. Data bits are sequentially output to the RSC1 in the turbo encoder in quantities equivalent to the number of non-interleaved assembled frames size. Data  
25 bits are output to the RSC2 in quantities equivalent to

- 29 -

the number of assembled frame size which are interleaved according to the addresses of the interleaving address mapper generated by the interleaving processor.

In another exemplary method, in the frame segmenting operation, the input data bits are sequentially stored in the memory for interleaving. Data bits are sequentially output to the RSC1 in the turbo decoder in quantities equivalent to the size of the segmented frame size. Data bits are interleaved to the RSC2 and output in quantities equivalent to the size of the assembled frame size.

Accordingly, the turbo channel encoder of FIG. 3 and the turbo channel decoder of FIG. 6 assemble input data frames into a super frame to encode and decode the input frames by the super frame unit when the input data frames are too short, and segment an input frame into multiple sub frames to encode and decode the input frame by the sub frame unit when the input frame is too long, to increase transmission efficiency.

As described above, the embodiment of the present invention segments/assembles input frames into sub/super frames of an appropriate length when the input data frame is very long or short, and then encodes and decodes the sub/super frames. In this manner, it is possible to reduce the number of required calculations and memory capacity

- 30 -

required in the decoder, while fully securing the performance of the turbo code encoder.

While the invention has been shown and described with reference to a certain preferred embodiment thereof, it  
5 will be understood by those skilled in the art that various changes in form and details may be made therein without departing from the spirit and scope of the invention as defined by the appended claims.



- 31 -

## WHAT IS CLAIMED IS:

1. A mobile communication system comprising:
  - a central processing unit (CPU) for determining a number of consecutive input frames required to combine a super  
5 frame, according to QoS parameter; and
  - a turbo encoder for turbo encoding the determined number of consecutive input frames.
2. The mobile communication system as claimed in claim 1, wherein the turbo encoder comprises:
  - 10 a first constituent encoder for encoding data size of the super frame;
  - an interleaver for interleaving the data size of the super frame; and
  - a second constituent encoder, operably connected to  
15 said interleaver, for encoding the interleaved data size of the super frame.
3. The mobile communication system as claimed in claim 2, said interleaver includes interleaving address mapper for interleaving said super frame size unit.
- 20 4. The mobile communication system as claimed in claim 2, further comprising:
  - a multiplexer for multiplexing respective outputs of the first and second constituent encoders; and
  - a channel interleaver for interleaving an output of

- 32 -

the multiplexer.

5. The mobile communication system as claimed in claim 4, said multiplexer puncturing a number of bit of said encoded symbols for rate matching.

5 6. The mobile communication system as claimed in claim 1, wherein the QoS parameters at least includes an information that can define data size of a frame.

7. The mobile communication system as claimed in claim 6, wherein the QoS parameter at least includes data rate, and  
10 the number of the input frames to be assembled into the super frame is determined by said input frame data rate and input frame length.

8. The mobile communication system as claimed in claim 7, wherein the input frame data size is less than 320 bits.

15 9. The mobile communication system as claimed in claim 1, wherein the QoS parameter at least includes a permissible delay, and the number of the input frames to be assembled in the super frame is determined by the permissible delay.

10. The mobile communication system as claimed in claim  
20 7, wherein the QoS parameter at least includes a permissible

- 33 -

error rate, and the number of the input frames to be assembled into the super frame is determined based on the permissible error rate.

5        11. The mobile communication system as claimed in claim 7, wherein said QoS parameter at least includes a receiver memory size, and the number of the input frames to be assembled into the super frame is determined based on the receiver memory size.

10       12. The mobile communication system as claimed in claim 1, wherein the system is installed in a base station.

13. The mobile communication system as claimed in claim 1, wherein the system is installed in a mobile station.

14. A channel encoding method for a mobile communication  
15 system, comprising the steps of:

determining the number of consecutive input frames required to assemble a super frame, according to a QoS parameter; and

turbo encoding the data size of super frame unit  
20 determined by combined input frame number of consecutive input frames.

15. The channel encoding method as claimed in claim 14, further comprising the step of performing channel interleaving

- 34 -

in accordance with the size of the turbo encoded symbols of the super frame.

16. The channel encoding method as claimed in claim 14, wherein the QoS parameter at least includes data rate, and the number of input frames to be assembled into the super frame is determined according to the input frame data rate and input frame length.

17. The channel encoding method as claimed in claim 16, wherein the input frame data size is less than 320 bits.

10 18. The channel encoding method as claimed in claim 16, wherein the QoS parameter at least includes a permissible delay, and the number of the input frames to be assembled into the super frame is determined by the permissible delay.

19. The channel encoding method as claimed in claim 16, wherein the QoS parameter at least includes a permissible error rate, and the number of the input frames to be assembled into the super frame is determined by the permissible error rate.

20. A mobile communication system comprising:  
20 a CPU for determining the number and size of sub frames which can be generated from segmenting one input frame, according to a QoS parameter; and

- 35 -

a turbo encoder for turbo encoding the input frame in accordance with said determined size of the subframes.

21. The mobile communication system as claimed in claim 20, wherein the turbo encoder comprises:

5 a first constituent encoder for encoding data size of the sub frames;

an interleaver for interleaving the data size of the sub frames; and

a second constituent encoder, operably connected to  
10 said interleaver, for encoding the interleaved data size of the sub frames.

22. The mobile communication system as claimed in claim 21, further comprising a channel interleaver for interleaving said encoded sub frames at a time.

15 23. The mobile communication system as claimed in claim 20, wherein the QoS parameter at least includes delay, data rate and error rate.

24. The mobile communication system as claimed in claim 23, wherein the number of segmented sub frames is determined  
20 according to the data rate and frame length.

25. The mobile communication system as claimed in claim 24, wherein the size of the input frame data at least includes

- 36 -

20480 bits.

26. The mobile communication system as claimed in claim 24, wherein the QoS parameter includes a permissible delay, and the number of segmented sub frames is determined by the 5 permissible delay.

27. The mobile communication system as claimed in claim 24, wherein the QoS parameter at least includes a permissible error rate, and the number of the segmented sub frames is determined by the permissible error rate.

10 28. The mobile communication system as claimed in claim 20, wherein the system is installed in a base station.

29. The mobile communication system as claimed in claim 20, wherein the system is installed in a mobile station.

30. A channel encoding method for a mobile communication 15 system, comprising the steps of:

determining the number of sub frames which can be generated from one segmented input frame, according to a QoS parameter; and

segmenting the input frame into the determined number of 20 sub frames and encoding the respective sub frames to encode the input frame by a sub frame unit, and

encoding the sub frame data size unit.

- 37 -

31. The channel encoding method as claimed in claim 30, further comprising the step of combining symbols encoded by the sub frame unit and channel interleaving the combined symbols.

5        32. The mobile communication system as claimed in claim 20, wherein the QoS parameter at least include permissible delay, data rate and error rate.

33. The channel encoding method as claimed in claim 32, wherein the number of segmented sub frames is determined  
10 according to the size of the input frame data defined by said data rate and a frame length

34. The channel encoding method as claimed in claim 33, wherein the size of the input frame data at least includes 20480 bits.

15        35. The channel encoding method as claimed in claim 33, wherein the number of segmented sub frames is determined by the permissible delay.

36. The channel encoding method as claimed in claim 33, wherein the number of the segmented sub frames is determined  
20 by the error rate.

37. A mobile communication system comprising:

- 38 -

a decoder for turbo decoding data being received as a super frame, wherein said super frame is combined as a plurality of consecutive original data frames; and

a frame recombiner for recombining an output of the decoder into the plurality of data frames in accordance with message information about the number of original frames constituting said super frame.

38. The mobile communication system as claimed in claim 37, said message information being received during a call setup.

39. The mobile communication system as claimed in claim 37, further comprising a CPU for determining the number of original frames constituting said super frame based upon received message information about the number of the original frames combined into the super frame and the size of the respective frames, and providing the determined number and size information to the frame recombiner.

40. The mobile communication system as claimed in claim 37, wherein the system is installed in a base station.

41. The mobile communication system as claimed in claim 37, wherein the system is installed in a mobile station.

42. A channel decoding method for a mobile communication



- 39 -

system, comprising the steps of:

turbo decoding data being received by a super frame,  
wherein said super frame is combined as a plurality of  
consecutive original data frames; and

5           recombining the turbo decoded data into the  
plurality of consecutive original input data frames in  
accordance with message information about the number of the  
frames constituting said super frame.

43. A mobile communication system comprising:

10           a decoder for segmenting a received data frame which  
includes multiple sub frame unit into multiple sub frame,  
turbo decoding said segmented sub frame unit; and

            a frame recombiner for recombining an output of the  
decoder into the original frame in accordance with message  
15 information about the number of the sub frames.

44. The mobile communication system as claimed in claim  
43, further comprising a CPU for determining the number of the  
sub frames and the size of the respective sub frames upon  
receiving the message information about the number of the sub  
20 frames and the size of the respective sub frames, and  
providing the determined number and size information to the  
frame recombiner.

45. The mobile communication system as claimed in claim  
43, wherein the system is installed in a base station.

- 40 -

46. The mobile communication system as claimed in claim 43, wherein the system is installed in a mobile station.

47. A channel decoding method for a mobile communication system, comprising the steps of:

5           segmenting received data into multiple sub frames according to received message information.

          turbo decoding said sub frame unit; and

          recombining the turbo decoded data frame into the received frame in response to said message information about  
10 the number of the sub frames.

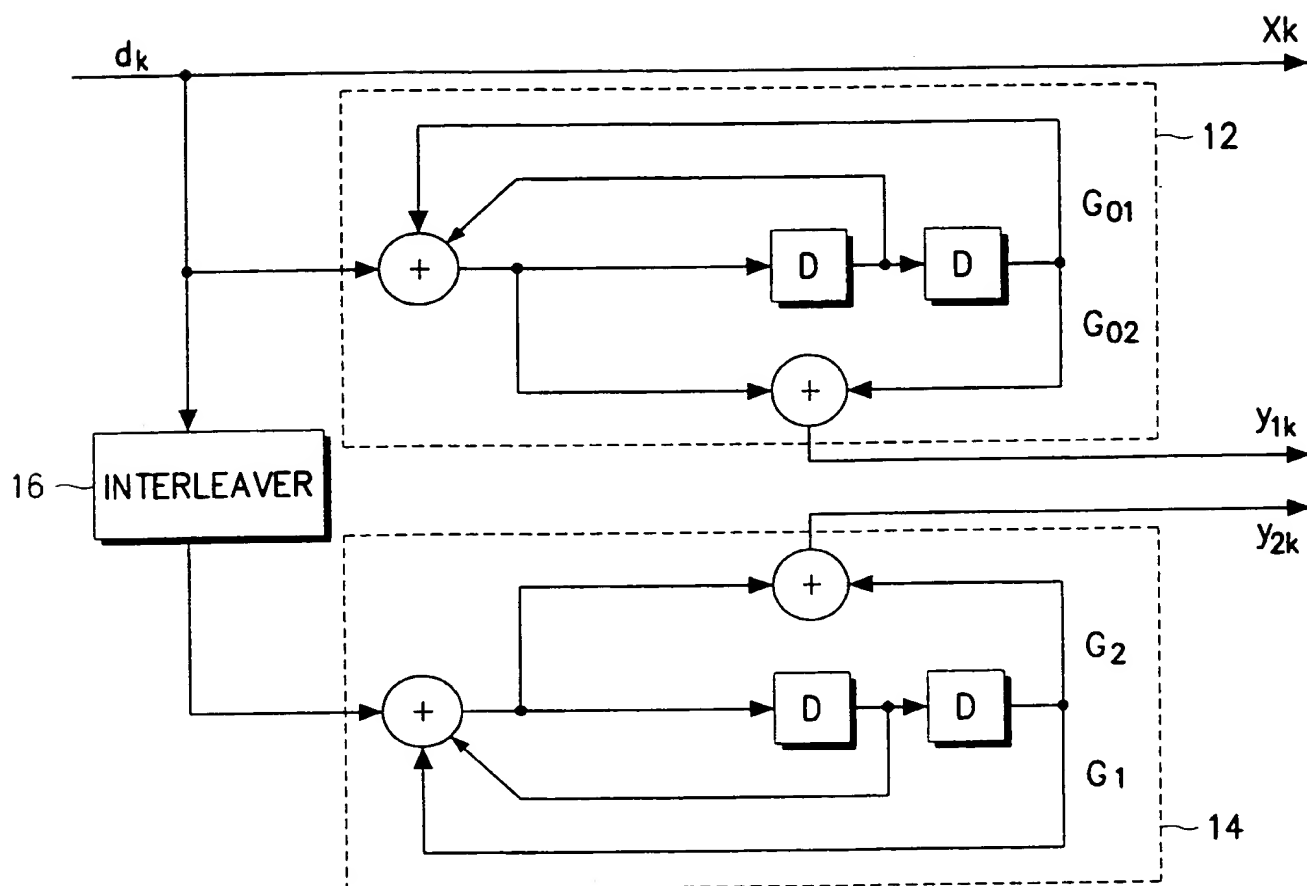


FIG. 1

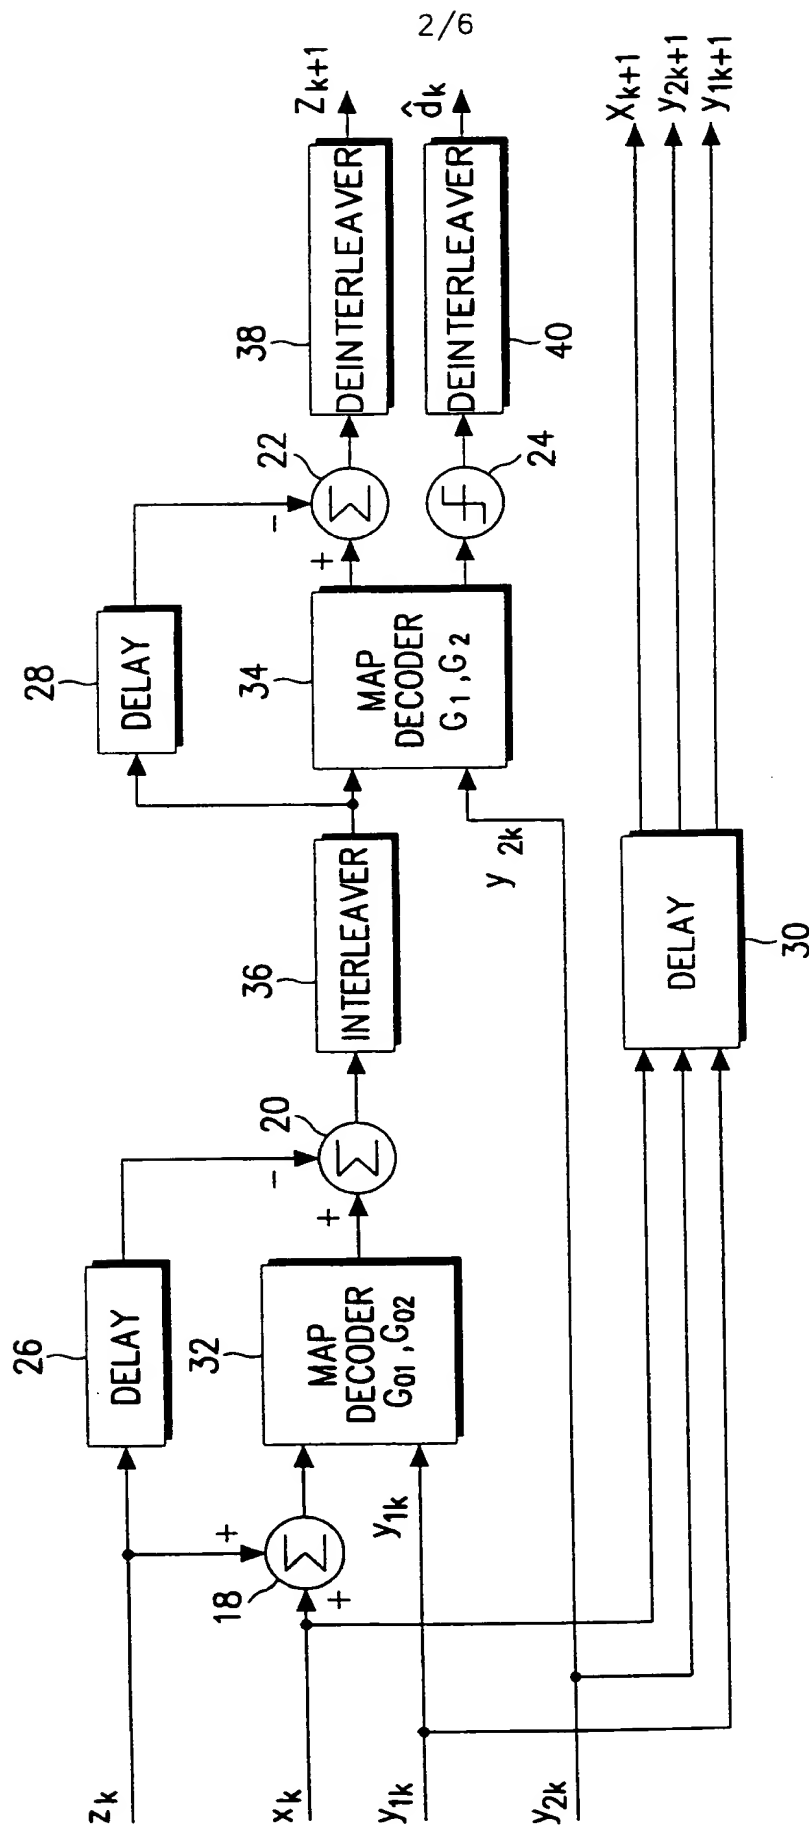


FIG. 2

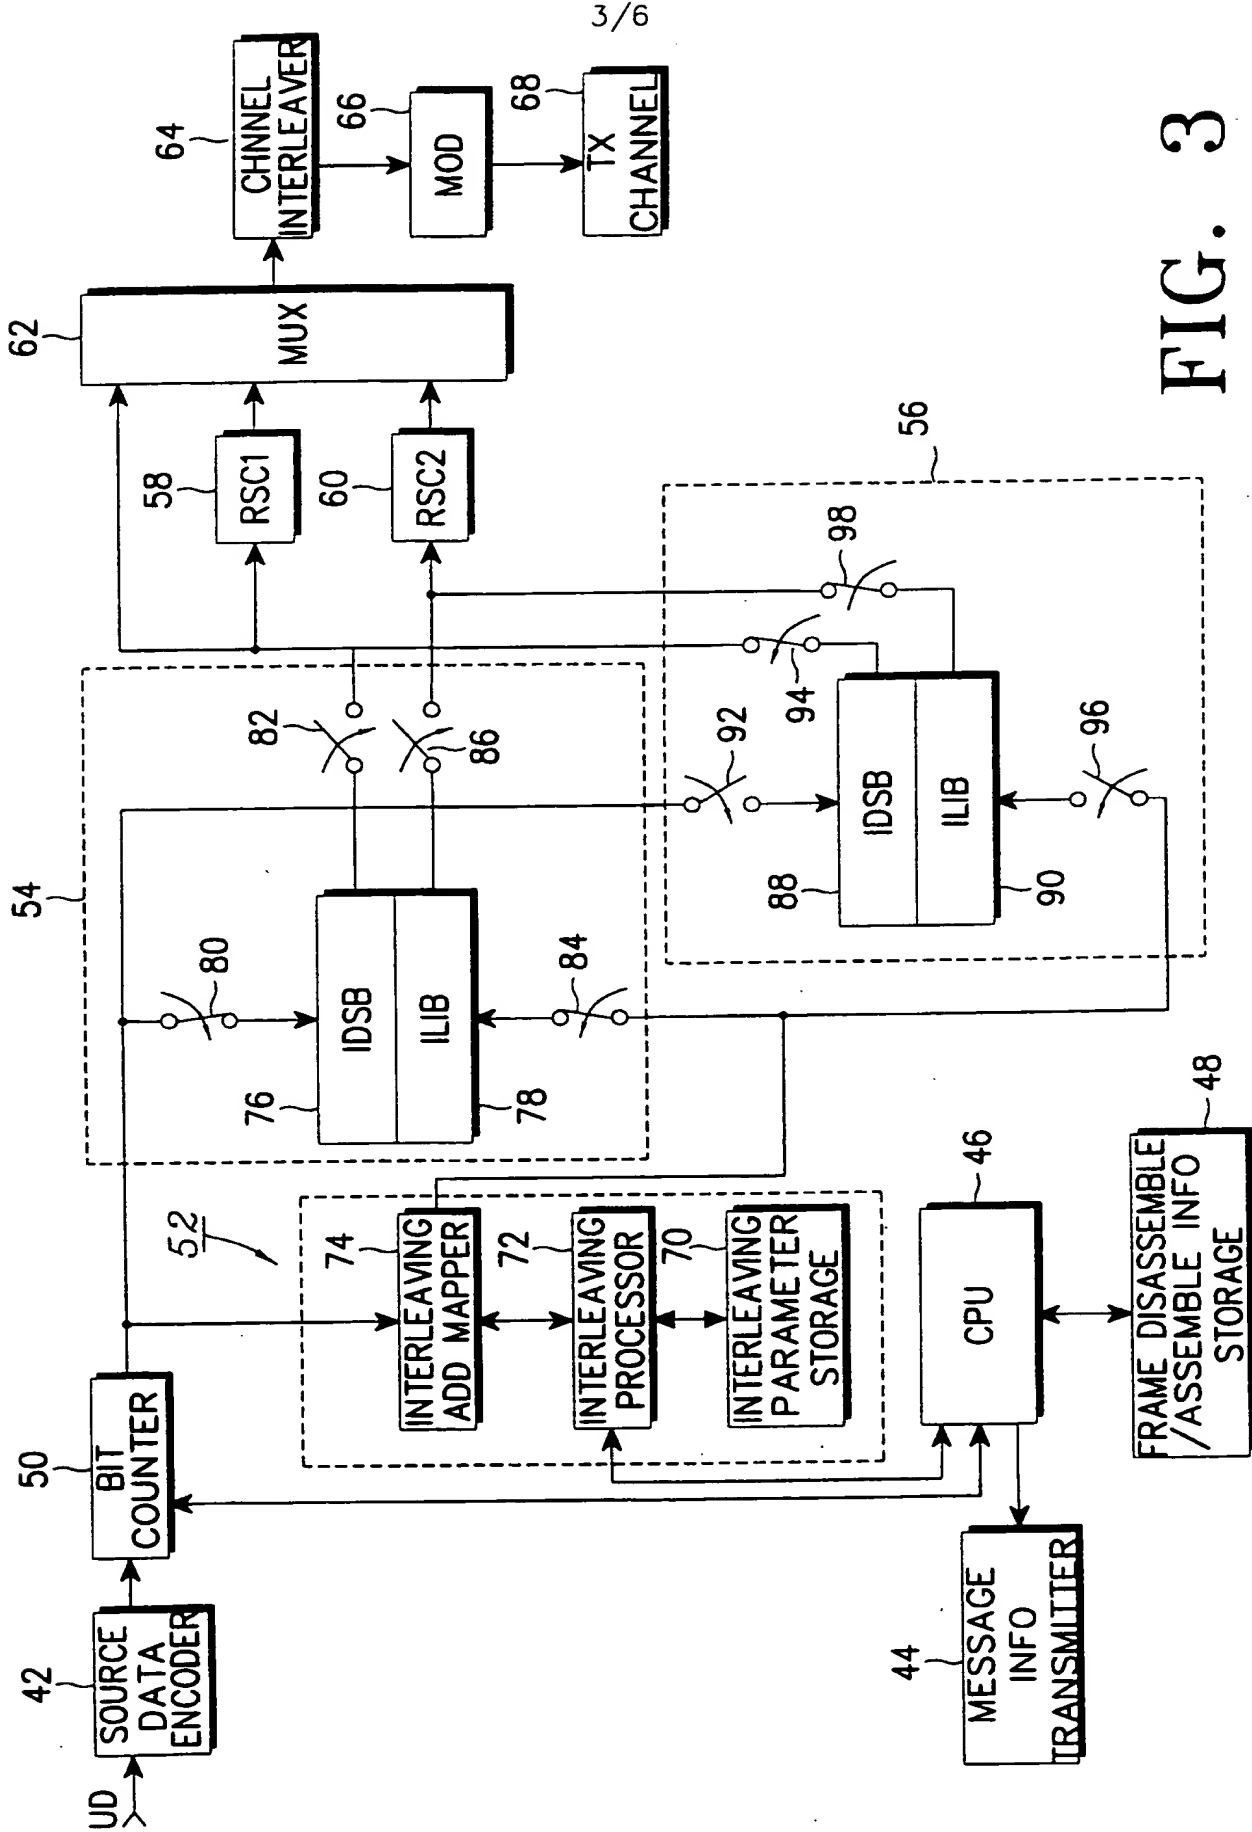


FIG. 3

4/6

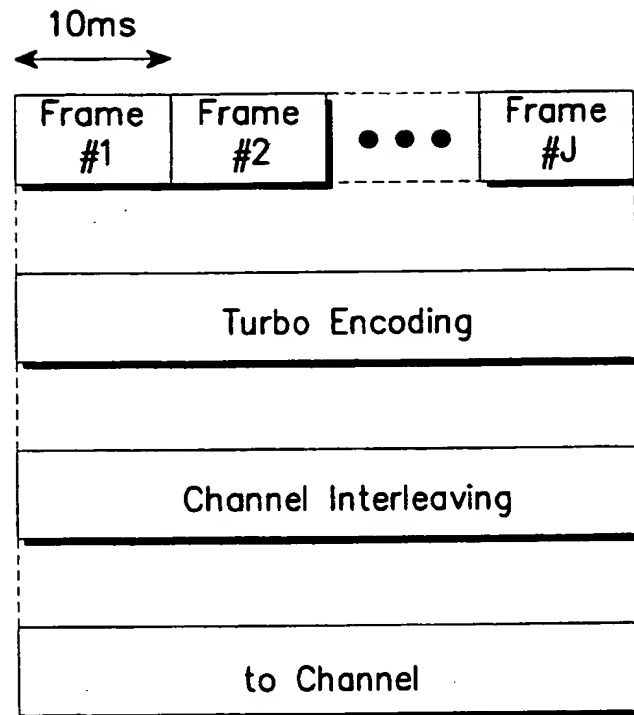


FIG. 4

5/6

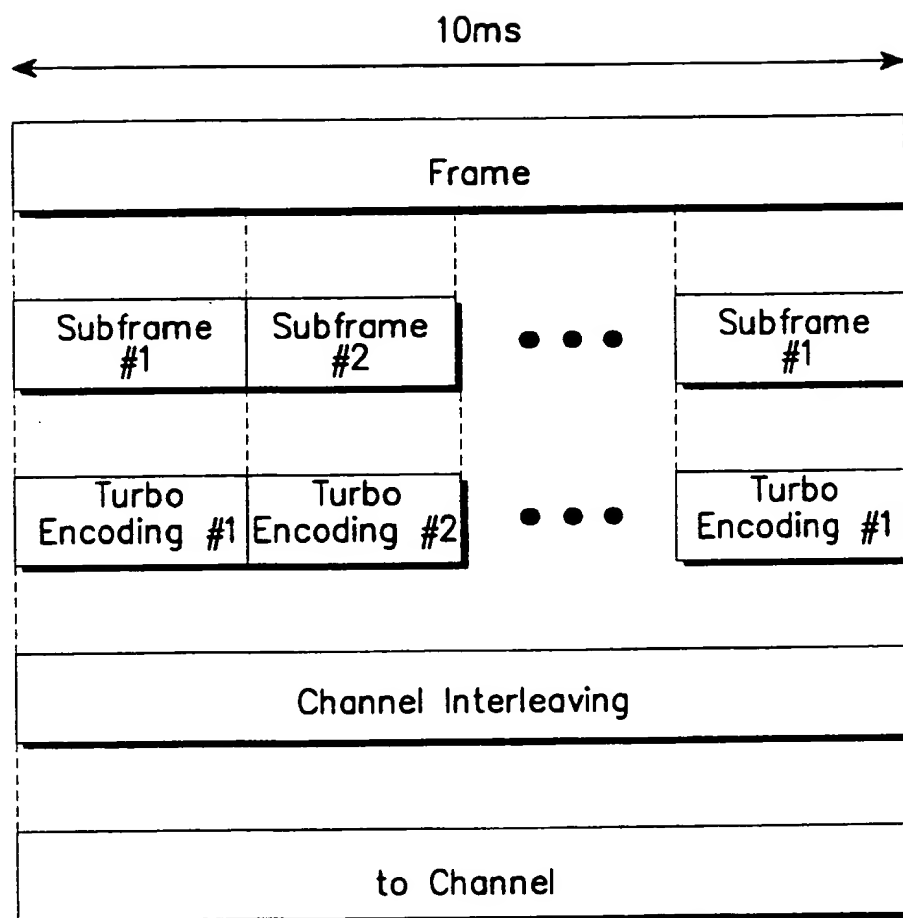


FIG. 5

6/6

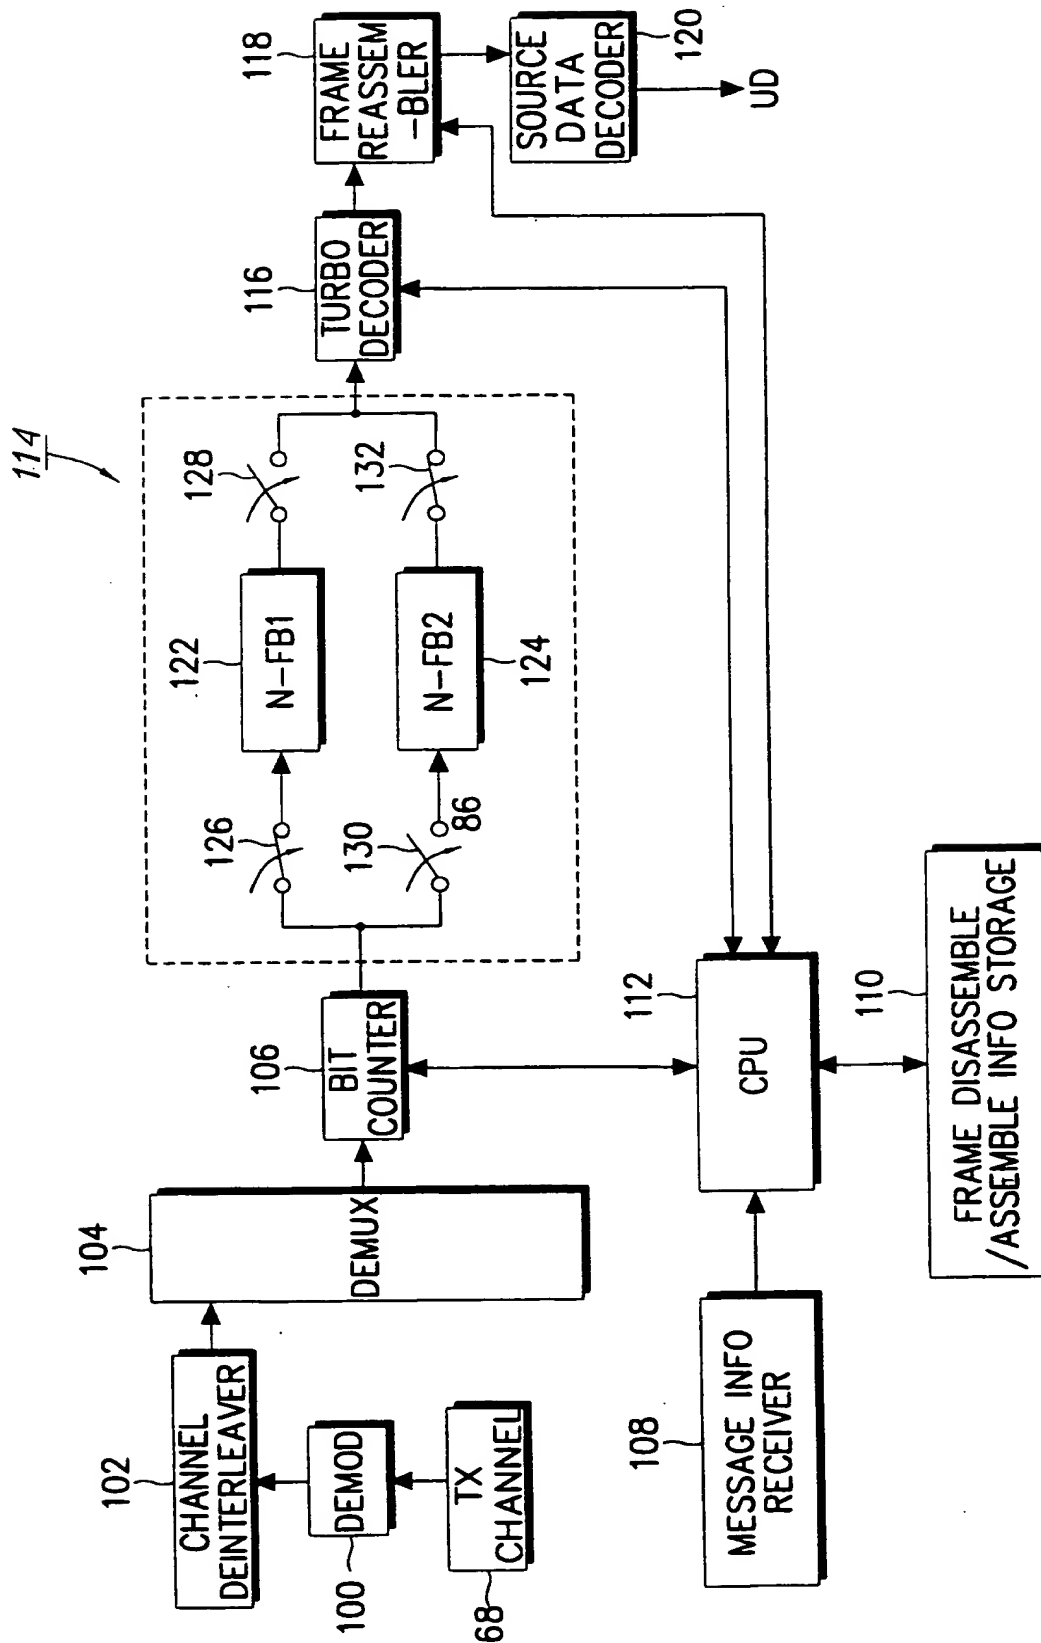


FIG. 6







## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04J 3/00, H04Q 7/32, H04B 7/26, H04L 1/18</b>		<b>A3</b>	(11) International Publication Number: <b>WO 99/50963</b>
			(43) International Publication Date: 7 October 1999 (07.10.99)
(21) International Application Number: PCT/KR99/00154		(81) Designated States: AU, BR, CA, CN, JP, RU, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 31 March 1999 (31.03.99)			
(30) Priority Data: 1998/11380 31 March 1998 (31.03.98) KR		<b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(71) Applicant: SAMSUNG ELECTRONICS CO., LTD. (KR/KR); 416, Maetan-dong, Paldal-gu, Suwon-shi, Kyungki-do 442-370 (KR).		(88) Date of publication of the international search report: 6 April 2000 (06.04.00)	
(72) Inventors: PARK, Chang, Soo; 72-2, Munjong-dong, Songpa-gu, Seoul 138-200 (KR). JEONG, Joong, Ho; 63-34, Chamwon-dong, Socho-gu, Seoul 137-030 (KR). LEE, Hyeon, Woo; Byeoksan Apt., #806-901, Kwonson-dong, Kwonson-gu, Suwon-shi, Kyonggi-do 441-390 (KR).			
(74) Agent: LEE, Keon, Joo; Mihwa Building, 110-2, Myongryun-dong, 4-Ga, Chongro-gu, Seoul 110-524 (KR).			

(54) Title: TURBO ENCODING/DECODING DEVICE AND METHOD FOR PROCESSING FRAME DATA ACCORDING TO QoS

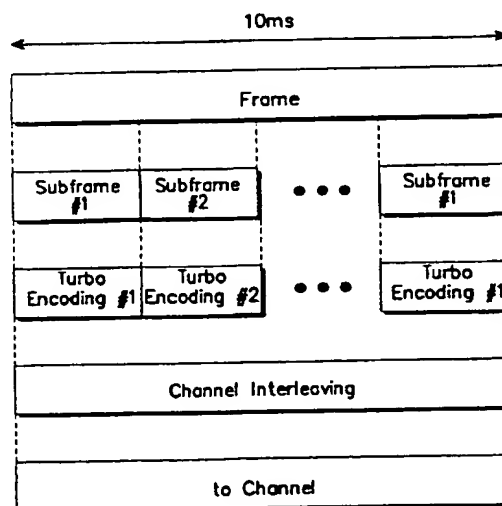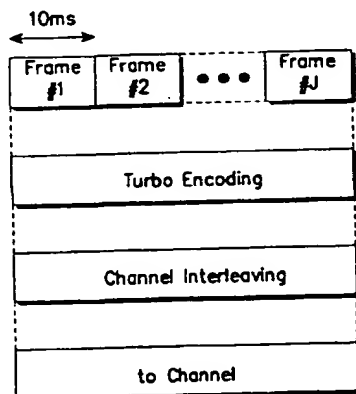

## (57) Abstract

A turbo channel encoding/decoding device for a CDMA communication system. The device segments an input frame into multiple sub frames of an appropriate length when the input data frame is very long, and then encodes and decodes the sub frames. Otherwise, when the input data frames are very short, the device combines input frames into one super frame of an appropriate length and then encodes and decodes the super frame. After frame encoding/decoding, the frames are recombined into the original input frames.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/KR 99/00154

## A. CLASSIFICATION OF SUBJECT MATTER

IPC<sup>6</sup>: H 04 J 3/00; H 04 Q 7/32; H 04 B 7/26; H 04 L 1/18

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC<sup>6</sup>: H 04 J 3/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, EPODOC, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0652680 A (ERICSSON), 10 May 1995 (10.05.95), page 14, 18; claim 1; fig.6.	1-47
A	US 5430774 A (DUPUY), 04 July 1995 (04.07.95), abstract; fig.2.	1-47
A	WO 98/09391 A (ERICSSON), 05 March 1998 (05.03.98), abstract.	1-47
	----	

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

### \* Special categories of cited documents:

„A“ document defining the general state of the art which is not considered to be of particular relevance  
 „E“ earlier application or patent but published on or after the international filing date  
 „L“ document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)  
 „O“ document referring to an oral disclosure, use, exhibition or other means  
 „P“ document published prior to the international filing date but later than the priority date claimed

„T“ later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention  
 „X“ document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone  
 „Y“ document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art  
 „&“ document member of the same patent family

Date of the actual completion of the international search  03 February 2000 (03.02.00)	Date of mailing of the international search report  18 February 2000 (18.02.00)
Name and mailing address of the ISA/AT Austrian Patent Office Kohlmarkt 8-10; A-1014 Vienna Facsimile No. 1/53424/200	Authorized officer  Fastenbauer  Telephone No. 1/53424/447

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR 99/00154

Patent document cited in search report			Publication date	Patent family member(s)			Publication date
EP	A2	652680	10-05-1995	AU	A1	77570/94	18-05-1995
EP	A3	652680	10-01-1996	AU	A1	10480/95	23-05-1995
				AU	A1	10483/95	23-05-1995
				AU	A1	10874/95	23-05-1995
				AU	A1	10876/95	23-05-1995
				AU	A1	81313/94	23-05-1995
				AU	A1	81314/94	23-05-1995
				AU	B2	680071	17-07-1997
				AU	A1	20799/97	24-07-1997
				AU	A1	23588/97	14-08-1997
				AU	B2	681721	04-09-1997
				AU	B2	681730	04-09-1997
				AU	B2	685885	29-01-1998
				AU	B2	690924	07-05-1998
				AU	B2	691850	28-05-1998
				AU	B2	695892	27-08-1998
				AU	A1	78659/98	01-10-1998
				AU	B2	697210	01-10-1998
				AU	A1	78658/98	15-10-1998
				BR	A	9404316	04-07-1995
				BR	A	9405702	28-11-1995
				BR	A	9405703	28-11-1995
				BR	A	9405704	28-11-1995
				BR	A	9405705	28-11-1995
				BR	A	9405743	05-12-1995
				BR	A	9405927	05-12-1995
				CA	AA	2134695	02-05-1995
				CA	AA	2152942	11-05-1995
				CA	AA	2152943	11-05-1995
				CA	AA	2152944	11-05-1995
				CA	AA	2152945	11-05-1995
				CA	AA	2152946	11-05-1995
				CA	AA	2152947	11-05-1995
				CN	A	1112345	22-11-1995
				CN	A	1116888	14-02-1996
				CN	A	1117329	21-02-1996
				CN	A	1117330	21-02-1996
				CN	A	1117331	21-02-1996
				CN	A	1117332	21-02-1996
				CN	A	1124074	05-06-1996
				EP	A1	677222	18-10-1995
				EP	A1	677223	18-10-1995
				EP	A1	677224	18-10-1995
				EP	A1	679304	02-11-1995
				EP	A1	681766	15-11-1995
				EP	A1	682829	22-11-1995
				EP	A4	677222	27-12-1995
				EP	A4	679304	27-12-1995
				EP	A4	681766	27-12-1995
				EP	A4	682829	27-12-1995
				EP	A4	677223	10-01-1996
				EP	A4	677224	10-04-1996
				FI	A	953263	30-06-1995
				FI	A	953264	30-06-1995
				FI	A	953265	30-06-1995
				FI	A	953266	30-06-1995
				FI	A	953268	30-06-1995
				FI	A0	953262	30-06-1995
				FI	A0	953263	30-06-1995
				FI	A0	953264	30-06-1995
				FI	A0	953265	30-06-1995
				FI	A0	953266	30-06-1995
				FI	A0	953267	30-06-1995
				FI	A0	953268	30-06-1995
				FI	A	953267	22-08-1995
				FI	A	953262	30-08-1995
				JP	T2	8508627	10-09-1996
				JP	T2	8508628	10-09-1996
				JP	T2	8508629	10-09-1996
				JP	T2	8508630	10-09-1996
				JP	T2	8508631	10-09-1996
				JP	T2	8509340	01-10-1996
				JP	T2	8510607	05-11-1996
				NZ	A	276006	24-11-1997
				NZ	A	276005	19-12-1997

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR 99/00154

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		NZ A 276275	25-03-1998
		NZ A 276575	25-03-1998
		NZ A 264605	27-04-1998
		NZ A 276272	27-04-1998
		NZ A 276573	26-06-1998
		NZ A 329295	26-06-1998
		NZ A 329296	26-06-1998
		NZ A 329297	26-06-1998
		NZ A 329422	28-05-1999
		NZ A 329423	28-05-1999
		NZ A 329424	28-05-1999
		NZ A 329738	28-05-1999
		NZ A 329740	28-05-1999
		NZ A 329741	28-05-1999
		SE A0 9403725	31-10-1994
		SE A 9403725	19-06-1995
		SG A1 43316	17-10-1997
		SG A1 45433	16-01-1998
		SG A1 48506	17-04-1998
		SG A1 49235	18-05-1998
		SG A1 52706	28-09-1998
		US A 5603081	11-02-1997
		WO A1 9512930	11-05-1995
		WO A1 9512931	11-05-1995
		WO A1 9512932	11-05-1995
		WO A1 9512933	11-05-1995
		WO A1 9512934	11-05-1995
		WO A1 9512935	11-05-1995
		WO A1 9512936	11-05-1995
		US A 5778316	07-07-1998
		US A 5539748	23-07-1996
		US A 5570467	29-10-1996
		US A 5574996	12-11-1996
		US A 5577046	19-11-1996
		US A 5604744	18-02-1997
		US A 5633874	27-05-1997
		US A 5655215	05-08-1997
		US A 5678179	14-10-1997
		US A 5694391	02-12-1997
		US A 5701298	23-12-1997
		US A 5722078	24-02-1998
		US A 5734645	31-03-1998
		US A 5768276	16-06-1998
		US A 5883885	16-03-1999
		US A 5923649	13-07-1999
		US A 5930239	27-07-1999
		US A 5970057	19-10-1999
		AU B2 670333	11-07-1996
		BR A 9305656	03-12-1996
		CN A 1086061	27-04-1994
		GB A0 9406728	15-06-1994
		GB A1 2275592	31-08-1994
		GB A0 9612697	21-08-1996
		GB A1 2300337	30-10-1996
		GB B2 2275592	26-03-1997
		GB B2 2300337	26-03-1997
		HK A1 1007368	09-04-1999
		HK A1 1007369	09-04-1999
		MX A1 9305778	29-04-1994
		SE A0 9401909	02-06-1994
		SE A 9401909	15-07-1994
		US A 5404355	04-04-1995
		WO A1 9408432	14-04-1994
		AU A1 23432/97	17-10-1997
		BR A 9708277	03-08-1999
		CA AA 2250573	02-10-1997
		CN A 1219335	09-06-1999
		WO A1 9736449	02-10-1997
		AU A1 60202/96	30-12-1996
		WO A1 9641493	19-12-1996
US A 5430774	04-07-1995	AT E 175067	15-01-1999
		AU A1 50619/93	09-06-1994
		AU B2 668600	09-05-1996
		DE C0 69322748	04-02-1999
		DE T2 69322748	20-05-1999

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR 99/00154

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
				EP A1 600773	08-06-1994
				EP B1 600773	23-12-1998
				ES T3 2128403	16-05-1999
				FI A0 935277	26-11-1993
				FI A 935277	31-05-1994
				FR A1 2698744	03-06-1994
				FR B1 2698744	13-01-1995
				NO A0 934308	29-11-1993
				NO A 934308	31-05-1994
				AU A1 38914/97	19-03-1998
WO A1 9809391			05-03-1998	CN A 1234155	03-11-1999
				EP A1 922340	16-06-1999